

Distributed by:





JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242


The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 738785


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AD	39				N	REV PER 063C-0506-04	11NOV04	JR/DS

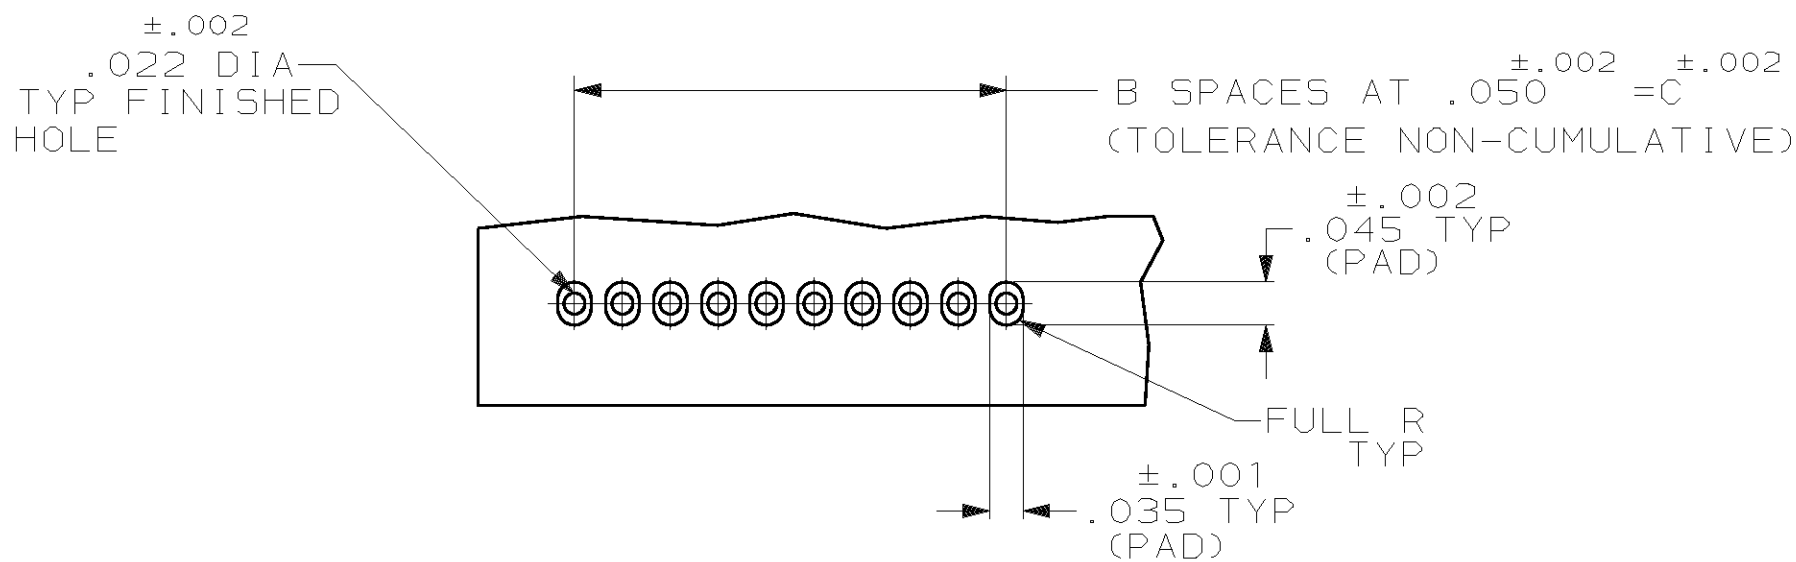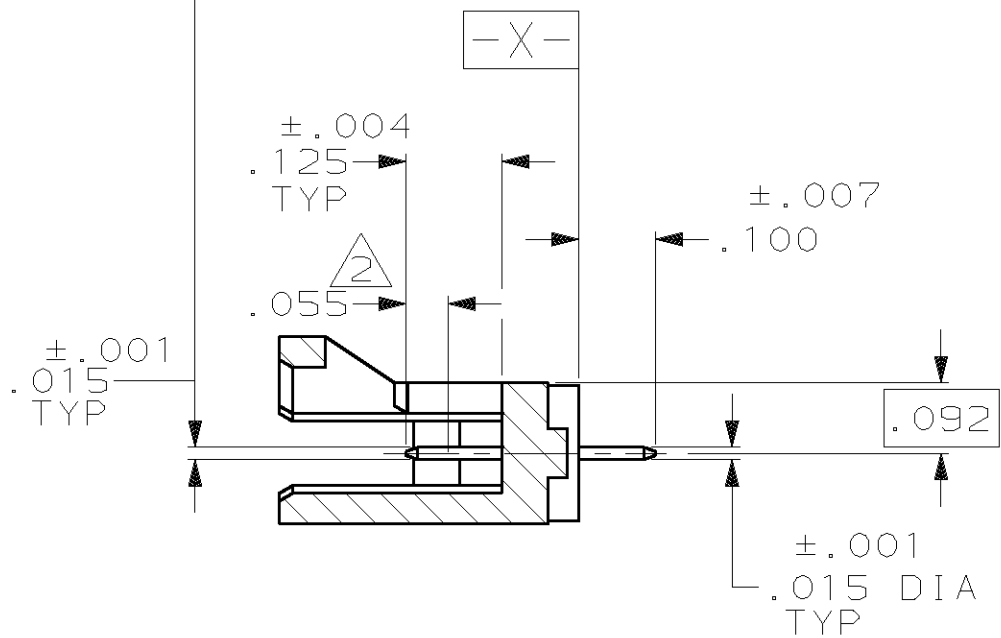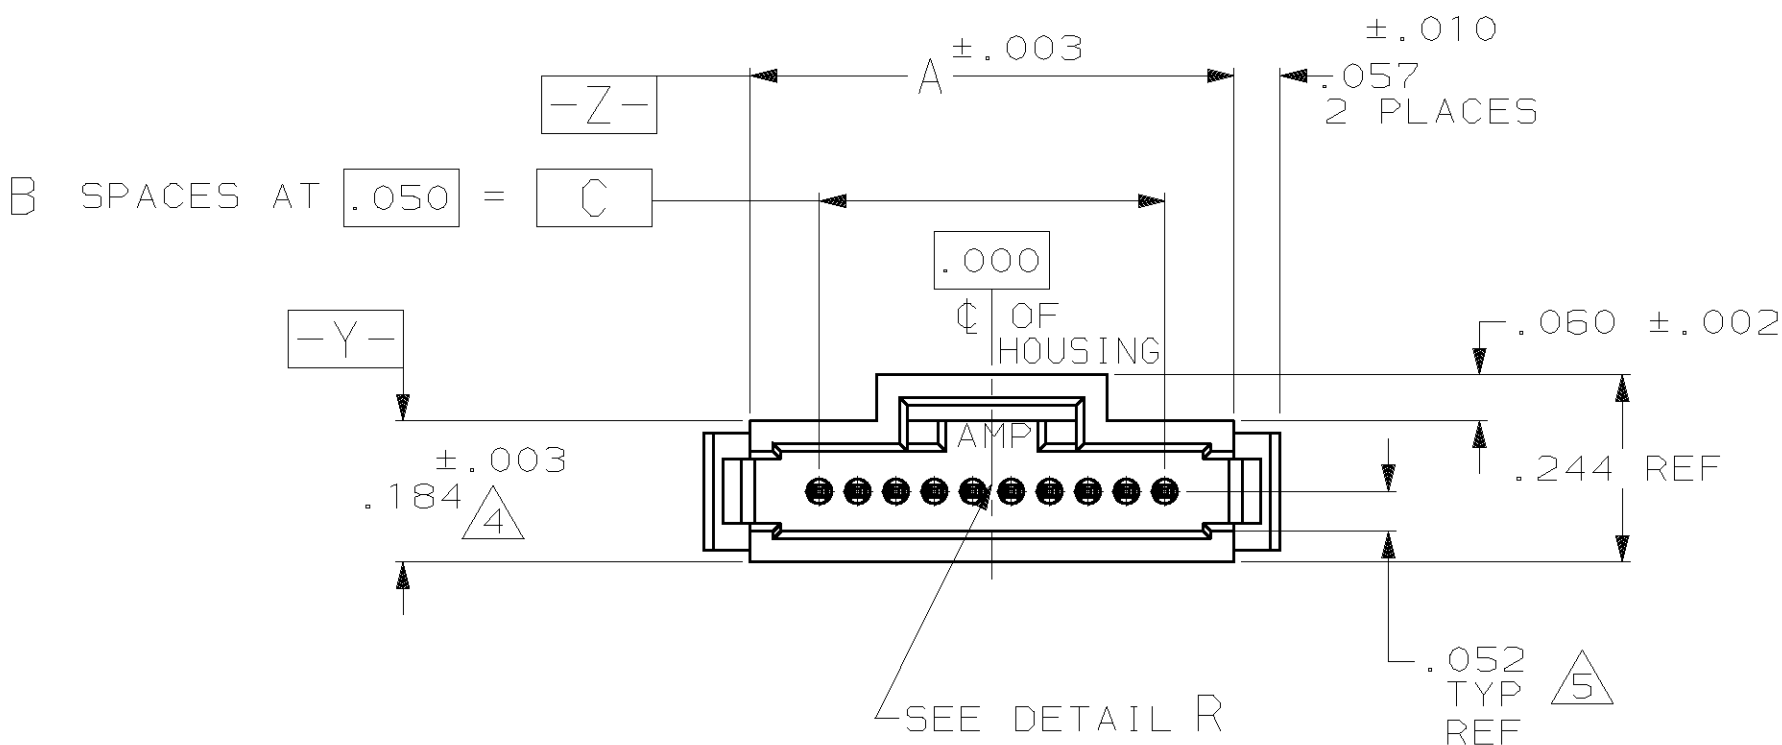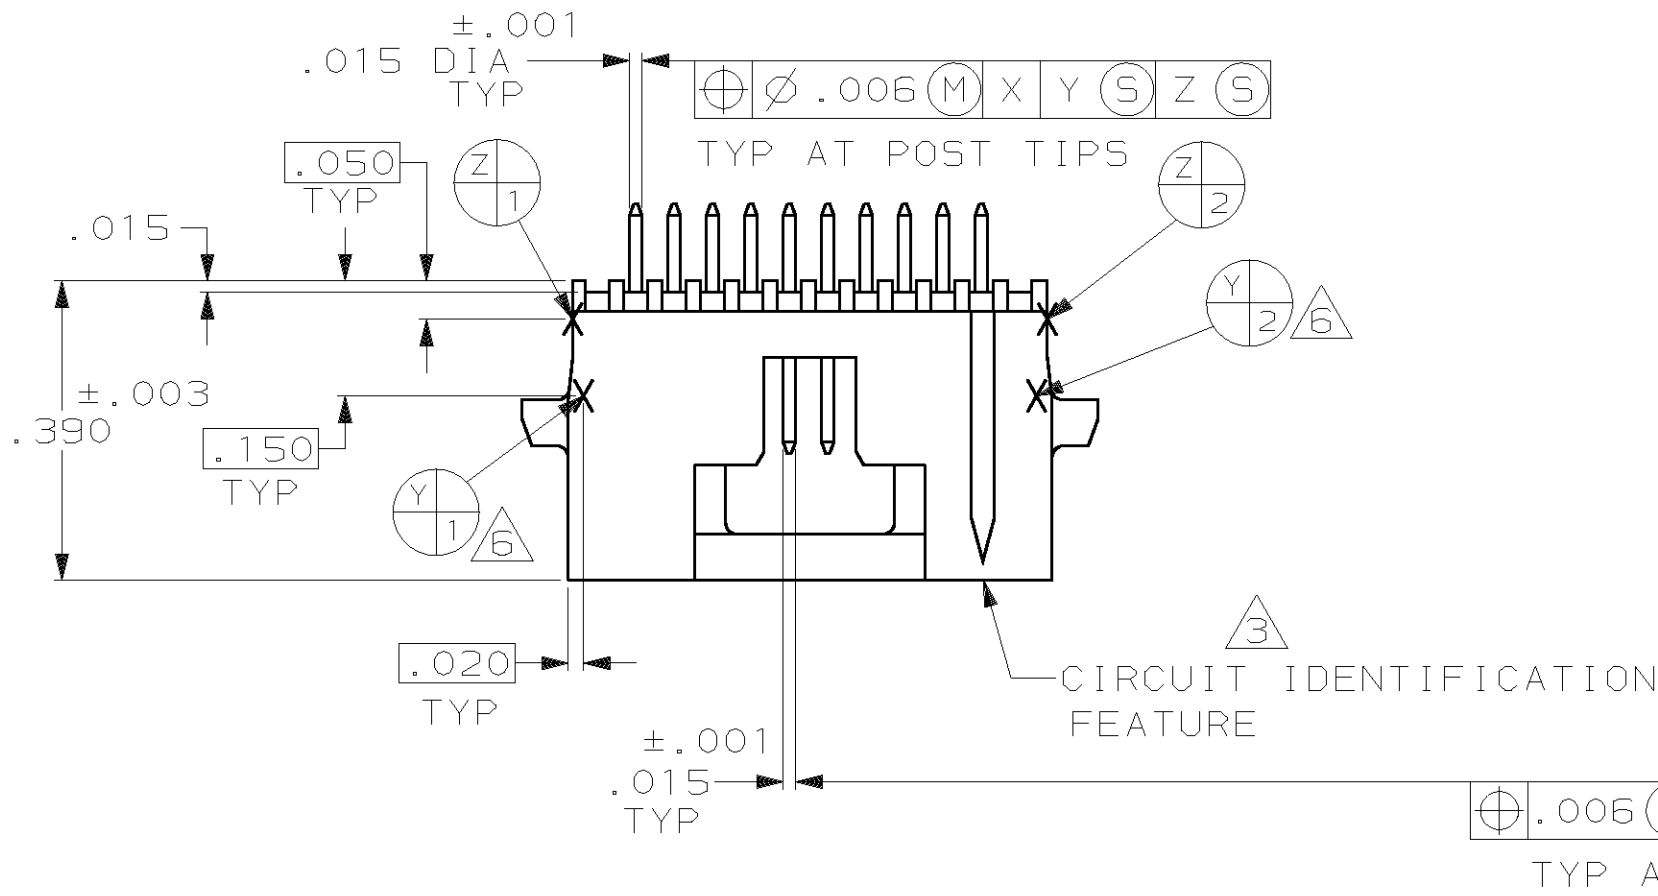

RECOMMENDED HOLE PATTERN

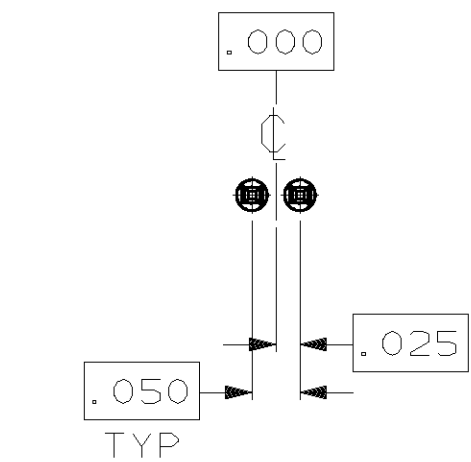

BASIC DIMENSIONS FOR
ODD NO OF SPACES
(SEE TABLE)

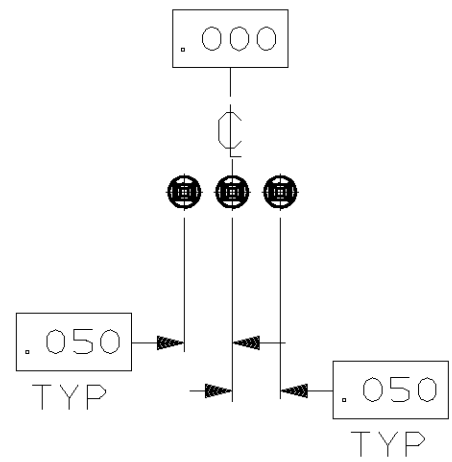

BASIC DIMENSIONS FOR
EVEN NO OF SPACES
(SEE TABLE)

- 1 CONTACT AREAS PLATED WITH .000030 GOLD, SOLDER TAILS PLATED WITH .000150 TIN-LEAD, ALL OVER .000050 NICKEL
- 2 POINT OF MEASUREMENT FOR GOLD THICKNESS
- 3 CIRCUIT IDENTIFICATION FEATURE OMITTED ON 4,5,6 AND 7 POSITION HEADER ASSEMBLIES
- 4 DIMENSION APPLIES AT BASE OF SHROUD
- 5 THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST & HOUSING
- 6 Y 3 Y 4 ARE LOCATED THE SAME AS Y 1 Y 2 EXCEPT ON OPPOSITE SIDE OF HOUSING.
- 7 CONTACT AREAS PLATED WITH .000030 GOLD, SOLDER TAILS PLATED WITH .000150 TIN, ALL OVER .000050 NICKEL

	1.250	25	1.430	26	7-104071-0
	2.450	49	2.630	50	6-104071-9
	2.200	44	2.380	45	6-104071-8
	1.950	39	2.130	40	6-104071-7
	1.750	35	1.930	36	6-104071-6
	1.300	26	1.480	27	6-104071-5
	1.050	21	1.230	22	6-104071-4
	.800	16	.980	17	6-104071-3
	.600	12	.780	13	6-104071-2
	.550	11	.730	12	6-104071-1
	.350	7	.530	8	6-104071-0
	.300	6	.480	7	5-104071-9
	.250	5	.430	6	5-104071-8
	.150	3	.330	4	5-104071-7
	1.450	29	1.630	30	5-104071-6
	1.200	24	1.380	25	5-104071-5
	.950	19	1.130	20	5-104071-4
	.700	14	.880	15	5-104071-3
	.200	4	.380	5	5-104071-2
	.450	9	.630	10	5-104071-1
OBSOLETE	1.250	25	1.430	26	2-104071-0
OBSOLETE	2.450	49	2.630	50	1-104071-9
OBSOLETE	2.200	44	2.380	45	1-104071-8
OBSOLETE	1.950	39	2.130	40	1-104071-7
OBSOLETE	1.750	35	1.930	36	1-104071-6
OBSOLETE	1.300	26	1.480	27	1-104071-5
OBSOLETE	1.050	21	1.230	22	1-104071-4
OBSOLETE	.800	16	.980	17	1-104071-3
OBSOLETE	.600	12	.780	13	1-104071-2
OBSOLETE	.550	11	.730	12	1-104071-1
OBSOLETE	.350	7	.530	8	1-104071-0
OBSOLETE	.300	6	.480	7	104071-9
OBSOLETE	.250	5	.430	6	104071-8
OBSOLETE	.150	3	.330	4	104071-7
OBSOLETE	1.450	29	1.630	30	104071-6
OBSOLETE	1.200	24	1.380	25	104071-5
OBSOLETE	.950	19	1.130	20	104071-4
OBSOLETE	.700	14	.880	15	104071-3
OBSOLETE	.200	4	.380	5	104071-2
OBSOLETE	.450	9	.630	10	104071-1
	C	B	A	NO OF POSN	PART NUMBER

PART NO				
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± . 3 PLC DEC ± .005 ANGLES ± -				
DR 12-19-88 K. HELM				
CHK 12-19-88 H. MOLL				
APPD 12-19-88 R. DURBIN				
APPD 12-19-88 W. PARKER				
PRODUCT SPEC 108-1093				
FINISH				
APPLICATION SPEC 114-25031				
WEIGHT				
AMP INCORPORATED Harrisburg, Pa. 17105				
NAME				
HEADER ASSEMBLY, VERTICAL, SINGLE ROW, W/SIDE & END LATCHES, AMPMODU® System 50				
SIZE D				
FSCM NO 00779				
DRAWING NO 104071				
SCALE 4:1				
SHEET 1 OF 1				