


Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation at <http://www.download.phoenixcontact.com>. The General Terms and Conditions of Use apply to Internet downloads.

► Extract from the online catalog

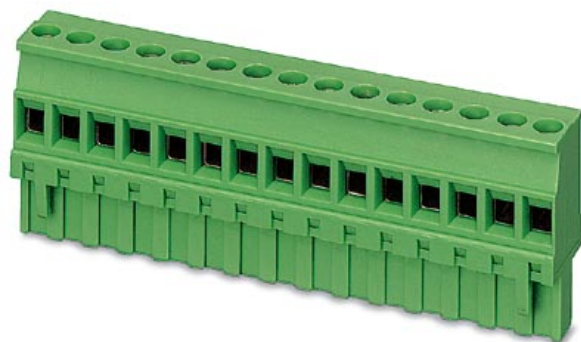

Plug component, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, type of connection: Screw connection

The illustration shows a 15-position version

Order No.	1792029
Ord designation	MVSTBR 2,5/ 3-ST
EAN	4017918044503
Pack	50 Pcs.
Customs tariff	85369010
Catalog page information	Page 130 (CC-2005)

► Technical data

Dimensions / positions

Pitch	5 mm
Dimension a	10 mm
Number of positions	3
Screw thread	M 3
Tightening torque, min	0.5 Nm

Technical data

Insulating material group	I
Rated surge voltage (III/3)	4 kV
Rated surge voltage (III/2)	4 kV
Rated surge voltage (II/2)	4 kV
Rated voltage (III/2)	320 V
Rated voltage (II/2)	630 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	12 A
Nominal voltage U_N	250 V
Nominal cross section	2.5 mm ²
Maximum load current	12 A (with 2.5 mm ² conductor cross section)
Insulating material	PA
Inflammability class acc. to UL 94	V0
Internal cylindrical gage	A3
Stripping length	7 mm

Connection data

Conductor cross section, rigid min.	0.2 mm ²
Conductor cross section, rigid max.	2.5 mm ²
Conductor cross section flexible min.	0.2 mm ²
Conductor cross section, flexible max.	2.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve min.	0.25 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve max.	2.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve min.	0.25 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve max.	2.5 mm ²
Conductor cross section AWG/kcmil min.	24
Conductor cross section AWG/kcmil max	12
2 conductors with same cross section, solid min.	0.2 mm ²
2 conductors with same cross section, solid max.	1 mm ²
2 conductors with same cross section, flexible, min.	0.2 mm ²
2 conductors with same cross section, flexible max.	1.5 mm ²
2 conductors with same cross section, flexible, ferrules without plastic sleeve min.	0.25 mm ²
2 conductors with same cross section, flexible, ferrules without plastic sleeve, max.	1 mm ²
2 conductors with same cross section, flexible, TWIN ferrules with plastic sleeve, min.	0.5 mm ²
2 conductors with identical cross section, flexible TWIN ferrules with plastic sleeve, max.	1.5 mm ²

► Certificates

Certificate logos



CSA


Comments	all numbers of positions are accepted
Nominal voltage U_N	300 V
Nominal current I_N	10 A
AWG/kcmil	28-12

UL

Comments	all numbers of positions are accepted
Nominal voltage U_N	600 V
Nominal current I_N	10 A
AWG/kcmil	30-12

► Drawings

Dimensioned drawing

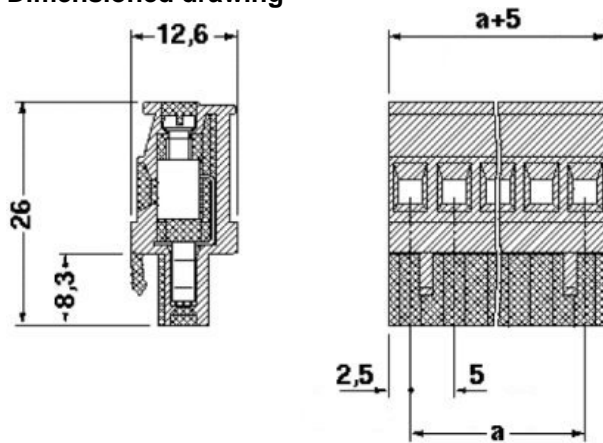

► Accessories

Item	Designation	Description
Marking		
1051993	B-STIFT	Marker pen, for manual labeling of unprinted Zack strips, smear-proof and waterproof, line thickness 0.5 mm
0805072	SK 5/3,8:SO	Marker card, special printing, self-adhesive, labeled acc. to customer requirements, 12 identical marker strips per card, max. 25-position labeling per strip, color: white
0805409	SK 5/3,8:UNBEDRUCKT	Marker cards, unprinted, with pitch divisions, self-adhesive, 10-section marker strips, 12 strips per card, can be labeled with M-PEN
Tools		
1205053	SZS 0,6X3,5	Screwdriver, bladed, matches all screw terminal blocks up to 4.0 mm ² connection cross section, blade: 0.6 x 3.5 mm, without VDE approval

► Additional products

Item	Designation	Description
General		
0707112	DFK-MSTB 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 320 V, pitch: 5.0 mm, no. of positions: 3, mounting: Direct mounting
1899854	EMSTBA 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: press in
1914865	EMSTBVA 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 200 V, pitch: 5.0 mm, no. of positions: 3, mounting: press in
1762059	MDSTB 2,5/ 3-G	Header, nominal current: 10 A, rated voltage: 320 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1736687	MDSTB 2,5/ 3-G1	Header, nominal current: 10 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1846522	MDSTBA 2,5/ 3-G	Header, nominal current: 10 A, rated voltage: 320 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1763045	MDSTBV 2,5/ 3-G	Header, nominal current: 10 A, rated voltage: 320 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1736726	MDSTBV 2,5/ 3-G1	Header, nominal current: 10 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1845798	MDSTBVA 2,5/ 3-G	Header, nominal current: 10 A, rated voltage: 320 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1802427	MDSTBW 2,5/ 3-G	Header, nominal current: 10 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1754452	MSTB 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1768192	MSTB 2,5/ 3-G-LA	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1757488	MSTBA 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1770494	MSTBA 2,5/ 3-G-LA	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1753453	MSTBV 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1755529	MSTBVA 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1736108	MSTBW 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1769243	SMSTB 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering
1769816	SMSTBA 2,5/ 3-G	Header, nominal current: 12 A, rated voltage: 250 V, pitch: 5.0 mm, no. of positions: 3, mounting: Soldering

► **Address**

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057
USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>
Phoenix Contact
Technical modifications reserved;