

## FEATURES AND SPECIFICATIONS

## Features and Benefits

- Solderable fitting nail provides retention to PCB
- Fully polarized to mating receptacle
- Tape and reel packaging eliminates handling and provides higher insertion speeds compared to tray packing or hand assembly

## Reference Information

Product Specification: PS-43045  
 Packaging: Tape and reel  
 UL File No.: E29179  
 CSA File No.: LR19980  
 Mates With: [43025](#)  
 Designed In: Millimeters

## Electrical

Voltage: 250V  
 Current: 5.0A max.  
 Contact Resistance: 10mΩ max.  
 Dielectric Withstanding Voltage: 1500V AC  
 Insulation Resistance: 1000 MΩ min.


## Physical

Housing: High temperature LCP, UL 94V-0  
 Contact: Brass  
 Plating: Tin or Gold


**molex®** 3.00mm (.118") Pitch  
**Micro-Fit 3.0™**  
**Wire-to-Board**  
**Header**

43045

**Dual Row, Right Angle, SMT**  
**With Solderable Fitting Nail**

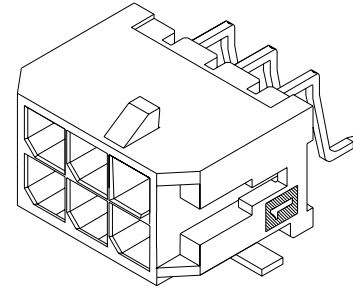

## CATALOG DRAWING (FOR REFERENCE ONLY)

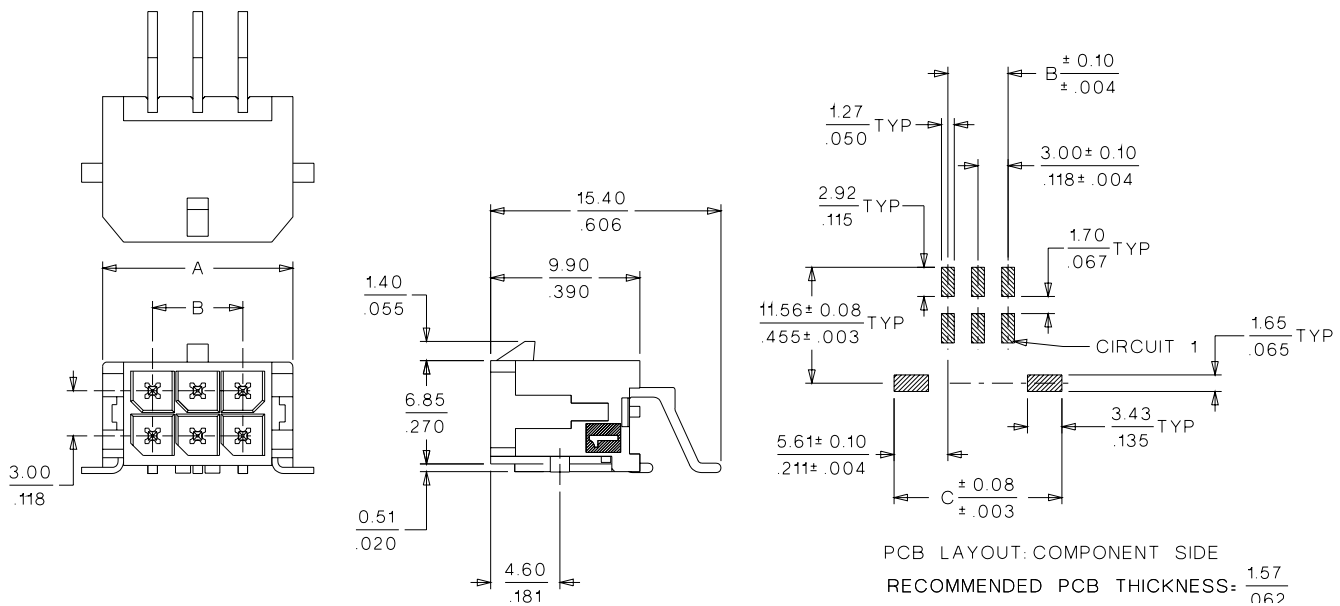

## ORDERING INFORMATION AND DIMENSIONS

Circuits	Order No.			Dimension		
	Tin	15μ" Gold	30μ" Gold	A	B	C
2	43045-0209	43045-0210	43045-0211	6.65 (.262)	3.00 (.118)	11.20 (.441)
4	43045-0409	43045-0410	43045-0411	9.65 (.380)	3.00 (.118)	14.20 (.559)
6	43045-0609	43045-0610	43045-0611	12.65 (.499)	6.00 (.236)	17.20 (.677)
8	43045-0809	43045-0810	43045-0811	15.65 (.616)	9.00 (.354)	20.20 (.795)
10	43045-1009	43045-1010	43045-1011	18.65 (.734)	12.00 (.472)	23.20 (.913)
12	43045-1209	43045-1210	43045-1211	21.65 (.852)	15.00 (.591)	26.20 (1.031)
14	43045-1409	43045-1410	43045-1411	24.65 (.970)	18.00 (.709)	29.20 (1.150)
16	43045-1609	43045-1610	43045-1611	27.65 (1.088)	21.00 (.827)	32.20 (1.268)
18	43045-1809	43045-1810	43045-1811	30.65 (1.206)	24.00 (.945)	35.20 (1.386)
20	43045-2009	43045-2010	43045-2011	33.65 (1.325)	27.00 (1.063)	38.20 (1.504)
22	43045-2209	43045-2210	43045-2211	36.65 (1.443)	30.00 (1.181)	41.20 (1.622)
24	43045-2409	43045-2410	43045-2411	39.65 (1.561)	33.00 (1.299)	44.20 (1.740)